




Product Data Sheet, March 2010

Makrolon Hygard® Laminated polycarbonate sheet

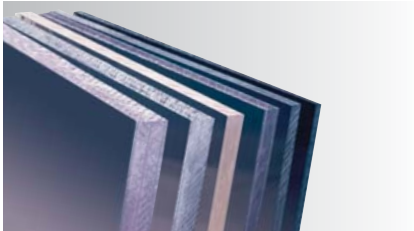

Your benefits:

- low inherent weight
- very good transparency
- anti-spall protection
- high abrasion resistance
- optimal UV protection

Makrolon Hygard® stands for transparent, multilayer laminated polycarbonate sheets. They meet all security requirements with regard to protection against forced entry and ballistic impact.

The CG (containment glazing) grades are particularly suitable for protection against forced entry with heavy tools such as sledge hammers and axes.

The BR (bullet-resistant) and the MS (multiple shots) grades were specially developed for ballistic protection and withstand even sustained fire from heavy automatic firearms.

Fields of Application:

Makrolon Hygard® sheets offer maximum protection without forming dangerous slivers or "spider webs." They are ideally suited for use in all high-level security areas. The main fields of application are:

- banks
- jeweler's shops
- penal institutions
- court buildings
- museums
- security vehicles
- night desks
- and many others

Product	Thickness	Weight	Light Transmission
CG 375	10 mm	12 kg/m ²	86%
CG 500	13,5 mm	16,2 kg/m ²	83%
BR 750	20 mm	24 kg/m ²	88%
BR 1250	33 mm	39,6 kg/m ²	67%
MS 1250	33 mm	39,6 kg/m ²	75%

The sheets are available in the following sizes:
1,520 x 2,440 mm
Other dimensions on request.

PROTECTION AGAINST FORCED ENTRY		
Standard	Product	Security Class
EN 356	CG 375	P7B
Forced entry test	CG 500	P8P
ASTM F 1233	CG 375	Class II, Step 15
Forced entry test	BR 1250	Class IV, Step 11
HPW	CG 375	Level II, Step 15
TP 0500.02	BR 1250	Level IV, Step 43-44
Forced entry test		

BALLISTIC PROTECTION		
Standard	Product	Security Class
EN 1063	BR 750	Level BR1-NS
Ballistic impact test	BR 1250	Level BR2-NS
	MS 1250	Level BR4-NS
UL 752	BR 750	Level I
Ballistic impact test	BR 1250	Level III
	MS 1250	Level VI

Product Liability Clause: This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.



makrolon®
Hygard



Product Data Sheet, March 2010

Makrolon Hygard®

Laminated polycarbonate sheet



i-line

Ideas, innovative, intelligent, interesting...

Bayer Sheet Europe i-line represents the next generation of quality products. This seal guarantees innovative and intelligent first-class solutions at all times for a multitude of requirements.

The protection against forced entry offered by **Makrolon Hygard®** is classed according to standards EN 356, ASTM F 1233 and HPW TP0500.02. During these tests, the sheets are exposed to physical and chemical attack.

The tables below show the order in which such attack takes place (to ASTM 1-41, to HPM 1-54).

FORCED ENTRY TESTING

EN 356	P1	P2A	P3A	P4A	P5A
Ball Test: 10 cm steel ball (4.1 kg) 3 hits:					
drop height (m)	1.5	3	6	9	9 (9hits)
Axe Test:	P6B	P7B	P8B		
number of hits	>30	>50	>70		
ASTM F 1233	Class I	Class II	Class III	Class IV	Class V
Blunt tool impacting (impacts)					
Sledge hammer (25)		5	10, 16	19, 22, 27	30, 33, 36, 39
4" dia. pipe/sledge (25)			9	18	29
Ram (10)			8	17	28
Ball peen hammer (10)	1	2			
Sharp tool impacting (impacts)					
Ripping bar		7	12	23	
Chisel/hammer (25)			13	25	35, 40
Angle iron/sledge (25)			15		
1-1/2" dia. pipe/sledge (25)		3			
Fire axe (25)				24	32, 38
Wood splitting maul (25)				21	34, 41
Thermal stress (minutes)					
Extinguisher, Co ₂ (1)		4			
Propane torch (5)		6	11	20	31
Chemical deterioration (amount)					
Gasoline (8 oz.)			14		
Aceton (8 oz.)				26	37
Total forced entry sequences	1	7	16	27	41
HPW TP 0500.02	Level I	Level II	Level III	Level IV	Level V
Blunt tool impacting (impacts)					
Sledge hammer/wedge (25)	1, 4	8, 10	18, 24, 26	29, 32, 39	42, 45, 48, 51, 54
4" dia. pipe/sledge (25)	2	7	17	28	41
Ram (10)		6	16	27	40
Sharp tool impacting (impacts)					
Chisel/hammer (25)		12	21, 23	33, 36, 38	47, 52
Angle iron/sledge (25)		13	22		
1-1/2" dia. pipe/sledge (25)	5				
Fire axe (25)				35	44, 50
Wood maul (25)		15	20	31	46, 53
Thermal stress (minutes)					
Fire extinguisher, Co ₂ (1)	3	9			
Propane torch (5)		11	19	30	
Acetylene (5)					43
Chemical deterioration (amount)					
Gasoline (8 oz.)		14			
Windshield washer (8 oz.)			25	34	
Acetone (8 oz.)				37	49
Total forced entry sequences	5	15	26	39	54

BALLISTIC IMPACT TEST

UL 752	Caliber	Ammunition	Weight in g.	min. velocity	No. of shots
Level 1	9 mm	full metal jacket	8.0	1.175 ft./sec.	3
Level 2	.357 magnum	jacketed lead soft point	10.2	1.250 ft./sec.	3
Level 3	.44 magnum	lead semi-wadcutter	15.6	1.350 ft./sec.	3
Level 6	9 mm	full metal jacket	8.0	1.400 ft./sec.	5
EN 1063/ PM 2000	Caliber	Ammunition	Weight in g.	min. velocity	No. of shots
BR1/ PM 1	22 long rifle	lead round nose	2.6	360 m/s	3
BR2/ PM 2	9 mm luger	full steel jacket	8	400 m/s	3
BR3/ PM 4	357 magnum	full steel jacket	10.2	430 m/s	3
BR4/ PM 4	44 rem.magnum	full copper jacket	15.6	440 m/s	3

Bayer Sheet Europe GmbH
 Otto-Hesse-Straße 19/T9, 64293 Darmstadt, Germany
 Tel. +49 6151 13 03-0
 Fax +49 6151 13 03-500
 www.bayersheeteurope.com
 sales@bayersheeteurope.com

A Bayer MaterialScience Company

